


# Resistive F/F/P touch panel structure

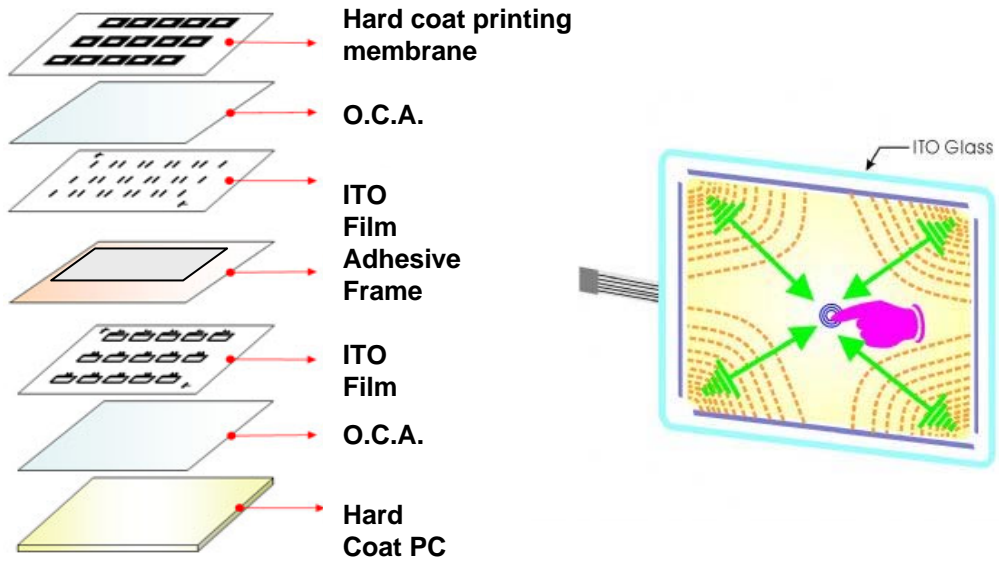

| Material                        | Thickness               | Material Standard      | High Quality Choice    | Economic Choice          |
|---------------------------------|-------------------------|------------------------|------------------------|--------------------------|
| Printing Film (Hard-Coated PET) | 125 $\mu$ m/188 $\mu$ m | 3H, D/S hard coated    | MIPOX/ Nakai           | Nakai                    |
| Optical Clear Adhesive (O.C.A.) | 25/33/50 $\mu$ m        | Optical clear          | Lintec                 | Taiwan O.C.A.            |
| ITO Film                        | 188 $\mu$ m             | 3H, ANR                | MIPOX                  | Korea / Taiwan base film |
| Adhesive Frame                  | 80 $\mu$ m              |                        |                        |                          |
| ITO Film                        | 188 $\mu$ m             | 3H, ANR                | MIPOX                  | Korea / Taiwan base film |
| Optical Clear Adhesive (O.C.A.) | 25/33/50 $\mu$ m        | Nitto, 3M              | Lintec                 | Taiwan O.C.A.            |
| Hard Coat PC sheet              | 0.8/1.0/1.2/2.0mm       | HB-F, Dual hard coated | Sumitomo Bakelite (住友) | OEM Hard Coat PC sheet   |